

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
9 October 2003 (09.10.2003)


PCT

(10) International Publication Number
WO 03/083351 A1

- (51) International Patent Classification⁷: F16M 11/32, 11/14
- (74) Agents: CANTALUPPI, Stefano et al.: Cantaluppi & Partners S.r.l., Via Matteotti, 26, I-35137 Padova (IT).
- (21) International Application Number: PCT/IT02/00202
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (22) International Filing Date: 28 March 2002 (28.03.2002)
- (25) Filing Language: Italian
- (26) Publication Language: English
- (71) Applicant (*for all designated States except US*): LINO MANFROTTO + CO. S.P.A. [IT/IT]; Via Sasso Rosso, 19, I-36061 Bassano del Grappa (IT).
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (72) Inventor; and
- (75) Inventor/Applicant (*for US only*): SPEGGIORIN, Paolo [IT/IT]; Via Colombara, 6A, I-36065 Mussolente (IT).

[Continued on next page]

(54) Title: SUPPORT FOR APPARATUS IN GENERAL AND, IN PARTICULAR, FOR OPTICAL OR PHOTOGRAPHIC APPARATUS AND THE LIKE

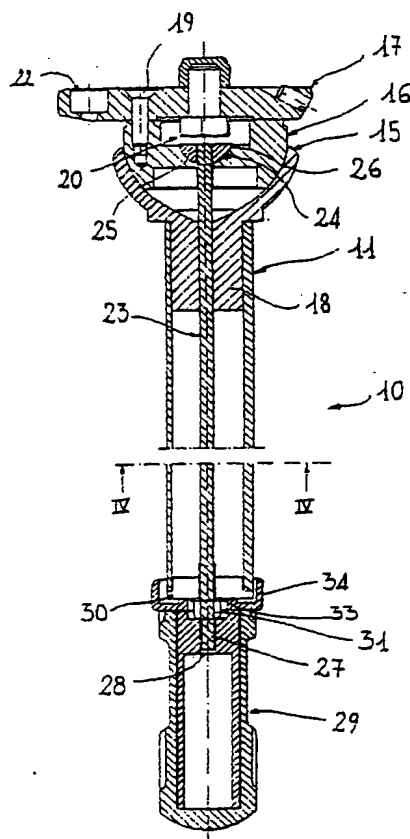

(57) Abstract: A support for apparatus in general and, in particular, for optical or photographic apparatus and the like is described and comprises a pillar (12) arranged to receive the apparatus at a first end and to be housed with its stem (11) in a seat (4) extending through a spider (3) of a tripod (4). The support also comprises, at the first end, an orientable platform (13) for the levelling of the apparatus independently of the positioning of the tripod (1), and the pillar (12) is structurally independent of the spider (3) and can be inserted removably in the seat (4).

WO 03/083351 A1